



AVANT[®]

300 Series



AVANT 300 – The compact and str



AVANT direct drive

- Direct hydraulic drive with four hydraulic drive motors, one on each wheel
- Superior pulling force
- AVANT turns and pulls with ease in all conditions
- The entire transmission is service free - no drive chains to tighten

Best lift capacity in their class

- Excellent stability thanks to the longer wheelbase
- Ideal weight distribution enables handling of heavier loads
- Moving of e.g. round bales is easy with Avant

Easily operated, well-positioned controls

Advanced operator comfort is a standard feature on AVANT:

- Well thought-out ergonomics
- Smooth drive control
- Auxiliary hydraulics can be operated by a pedal in the footwell or by a lever on the dashboard
- Two drive speed areas: selection of low and high speed with a pedal
- Excellent, unrestricted field of vision from the driver's seat

Real double speed

- Drive speed area can be selected during driving, without stopping the machine
- Control with a pedal in the footwell
- Twin pump in the drive system: versatility for driving and attachment operation

Top class components

Honda is a leading brand of petrol engines, and Kubota diesel engines are renowned for their quality all over the world. That is why they are on AVANTs. Hydraulic system is designed for heavy duty professional use - like on all AVANT models.

ong skid steer loader



Versatile

AVANT is the real multi purpose machine on farms, construction sites etc. On farm, for example, you can do many jobs in the cowhouse. In addition to fodder distribution you can handle the bedding, clean the feeding table, empty the manure gutter and stalls with beddings.

Outdoors, AVANT is an excellent tool. It can tackle a multitude of tasks—be it various building and maintenance jobs on the farm or working in tight situations like doing the demolition inside buildings where bigger machines cannot go. On many farms, AVANT collects more working hours than a tractor!

Economical


AVANT, as an investment, is very cost effective. They hold their value very well. When trading in your used AVANT you will find this out. The annual operating and capital costs are also very low.

Efficient

AVANT is a very fast and efficient fodder distributing machine. This efficiency is based on continuous movement: there is no need to do time consuming loading on a trailer or a wagon - instead you can drive all the time and transport the fodder in the bucket, silage fork or any other attachment. With AVANT you can also distribute all types of fodder all year round: round bales, silo fodder and hay fodder.



Technical data

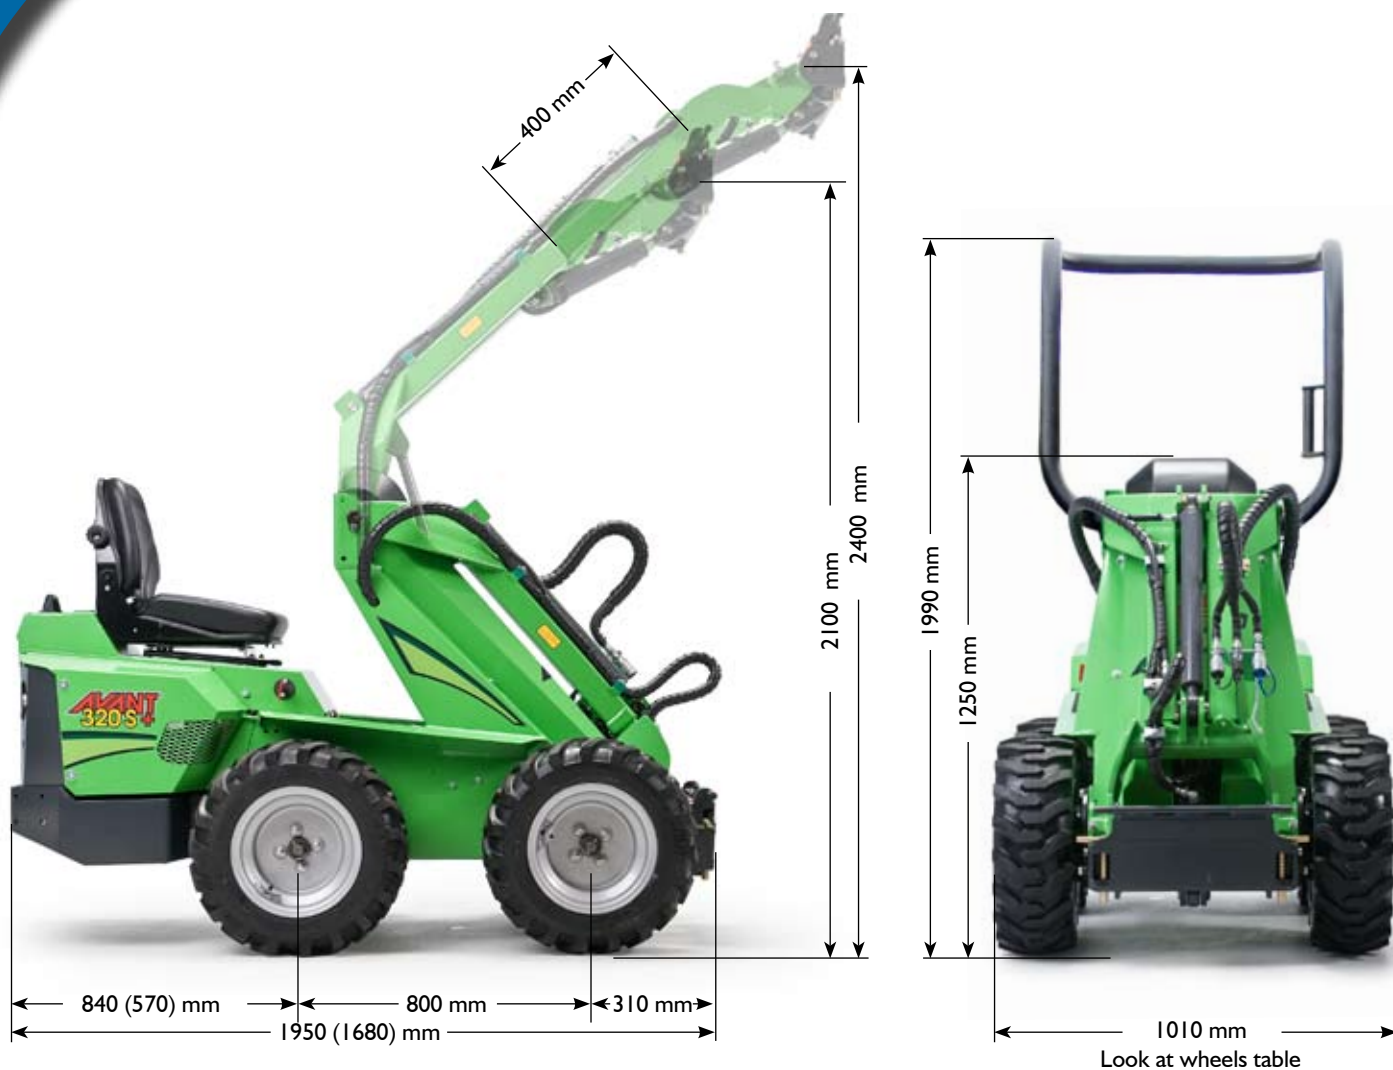

Model	AVANT 313S	AVANT 320S	AVANT 320S+
Length	1680 mm	1950 mm	1950 mm
Width	see table	see table	see table
Height	1200 mm	1250 mm	1250 mm
Weight	530 kg	720 kg	720 kg
Std. wheels	5x10 TR/ 20x8-10 Grass	23 x 8.50 - 12 TR	23 x 8.50 - 12 TR
Transmission, drive	hydraulic	hydraulic	hydraulic
Pulling force	650 kp	770 kp	1000 kp
Drive speed	0 - 4,5 / 0 - 9 km/h	0 - 4,5 / 0 - 9 km/h	0 - 4,5 / 0 - 9 km/h
Auxiliary hydraulics	22,5 l/min 175 bar	2x22,5 l/min 200 bar	2x22,5 l/min 220 bar
Lift capacity (hydraulic)	750 kg	850 kg	880 kg
Tipping load	500 kg	700 kg	700 kg
Engine make and type	Honda GX390	Kubota D722	Kubota D722
Engine output	10 kW (13 hp)	14 kW (20 hp)	14 kW (20 hp)
Fuel	unleaded petrol	Diesel	Diesel

Wheels

Wheel size	Machine width
4.00 - 12" TR*	790 mm
5.00 - 12" TR*	850 mm
5.00 - 12" TR	940 mm
20 x 8.00 - 10 Grass	1010 mm
23 x 8.50 - 12 TR	1020 mm
23 x 8.50 - 12 Grass	1020 mm
23 x 10.50 - 12 TR	1050 mm
23 x 10.50 - 12 Grass	1050 mm

*) with narrow wheel hubs

Options

Telescopic boom

All AVANT models can be fitted with a hydraulic telescopic boom. It gives 500 mm more outreach and 350 mm more lifting height, which improves loading and reaching capabilities considerably, making the loader more efficient and useful than you think.

Suspension seat

This adjustable seat gives more operator comfort. Also available with arm rests.

Seat belt

An investment in your safety. Two point seat belts ensures that the operator stays on the seat.

Hydraulic oil cooler

Prevents hydraulic oil overheating when working continuously for a longer period of time in hot conditions.

Extra counterweights

Keeps the loader more stable when there is a heavy load in the bucket. Mounts on the rear bumper.

Trailer coupling

Trailer coupling is standard 50 mm ball coupling. It mounts on a bracket which is bolted on the rear bumper. It is also possible to have the trailer coupling mounted on the extra counterweight.

ROPS frame

All AVANT 300 series models can be equipped with a ROPS safety frame, which complies with the ISO 3471 / SAE J1040 standard. Total machine height with ROPS frame is 1990 mm.

FOPS canopy

Installed on the ROPS, this safety canopy exceeds the ISO 3449 Level I / SAE J1043 FOPS criteria. Total machine height with FOPS is 2050 mm.

Boom floating

Allows free movement of attachment (follows the contours of ground) when using e.g. the dozer blade.

Flow divider valve

With this valve one can steplessly divide the hydraulic oil flow between drive and auxiliary hydraulics. A very useful option when most of the flow is required for the attachment and just a little for drive (e.g. when operating a trencher). For 320S+ model only.

Block heater (for diesel engines)

Facilitates starting when ambient temperature is below freezing point.

Snow chains

Better traction when driving on ice and snow.





General buckets

Width	Capacity	Weight
890 mm	180 l	57 kg
1050 mm	210 l	65 kg
1100 mm	215 l	68 kg
1280 mm	260 l	75 kg
1400 mm	285 l	90 kg

AVANT general buckets are designed to speed up your work and make it more efficient: the operator can see the front edge of the bucket from the driver's seat.

Light material buckets



Width	Capacity	Weight
1050 mm	400 l	95 kg
1100 mm	420 l	99 kg
1280 mm	485 l	105 kg
1600 mm	610 l	125 kg
1800 mm	685 l	137 kg

AVANT manufactures buckets for light materials handling (saw dust, manure, wood chips, mulch), snow removal etc.

High tip buckets



Width	Capacity	Weight
1050 mm	150 l	83 kg
1280 mm	370 l	100 kg

With high tip bucket you can reach longer and higher than with many bigger machines. The bucket tips over its front edge, which with the telescopic boom means a dump height of 3,15 m!

4 in 1 buckets



Width	Capacity	Weight
1100 mm	155 l	152 kg
1280 mm	170 l	175 kg

Efficient multi purpose bucket - can be used as a normal bucket as well as a dozer blade, leveler, stone picker etc. The front part of the bucket opens with 2 hydraulic cylinders located on the back side of the bucket, which enables dozing, levelling and picking of stones, tree stumps etc.

Pallet fork



Length	850/1100 mm
Weight	90/105 kg

AVANT pallet fork is the right attachment for lifting and handling of different types of light materials on pallets. Fork width is easily adjustable with quick-release locking mechanism.

Silage fork



Width	Weight
800 mm	85 kg
900 mm	100 kg
1050 mm	120 kg
1300 mm	140 kg

A robust silage fork equipped with a powerful hydraulic cylinder. The strong blade type pins of the grapple penetrate very well into all types of feed. The fork has replaceable tines, fastened with a bolt, made of reinforced steel.

Dozer blade for silage fork



Width, main blade	1200 mm
Width, side blade	550 mm
Weight	50 kg

The dozer blade mounts on the silage fork: just drive the fork into the blade and lock it with the upper grapple of the fork. Destined for cleaning of the floors in cowhouses, stables etc. Equipped with one side blade as standard.

Grain / flour dispenser



Capacity	300 l
Width	1100 mm
Weight	90 kg

AVANT grain dispenser is a 300 l bucket equipped with a hydraulic motor and a Ø 200 mm screw, destined for distribution of flour, crushed grain etc. Discharges to the right side or to the left side.

Silage block cutter



Width	950 mm
Weight	175 kg
Capacity	200-250 kg

With the silage cutter you can easily cut silage from silo and take it directly to the cattle. Thanks to the open design of the cutting blade visibility during silage distribution is very good. Cuts about 8 animals' silage at one time. Tines are made of reinforced steel.

Grapple bucket



Width	Weight
900 mm	80 kg
1050 mm	100 kg
1300 mm	120 kg

Grapple bucket combines a normal bucket and a grapple and is therefore suitable for a multitude of jobs. It can be used for transporting and loading of branches, wood chip, compost, straw, manure etc.

Manure fork



Tine length	800 mm
Width	1000 mm
Weight	60 kg

AVANT manure fork is a very useful attachment, destined for detaching and handling of manure and similar materials. The strong tines penetrate very well into compacted manure also and can carry a heavy load.

Carousel broom



Working width	1000 mm
Broom diameter	1000 mm
Broom material	Nylon
Weight	70 kg

This hydraulically operated broom is a useful attachment when sweeping materials to the side or away from the wall. Rotates in both directions and can be used for various tasks especially on the farm.

Straw blower bucket



Capacity	665 l
Height	1270 mm
Width	1460 mm
Weight	200 kg

With the straw blower bucket you can distribute straw quickly and easily to the cow stalls by driving with your Avant. The blower fan discharges the material up to 3-4 m distance, depending on engine rpm. The bucket can blow chopped straw, sawdust, turf and small wood chips.

Backhoe 205



Digging depth	2050 mm
Loading height	2000 mm
Slewing	140 °
Buckets	250/400/700 mm
Weight	280 kg

AVANT backhoe 205 is a very compact and amazingly powerful digging unit. Low weight allows transportation on trailer. Dozer blade at the bottom of the frame is standard feature.

Trencher



Digging depth	max 900 mm
Trench width	100 - 200 mm

With trencher you can easily dig narrow trenches without damaging lawns and gardens – this trencher is ideal for smaller cable or pipe laying. Planetary drive with hydraulic motor guarantee efficient and trouble free operation. Three different types of chains available: standard earth chain, frost chain and heavy duty chain with tungsten teeth.

Auger



Auger diameters	100 - 900 mm
Max. drilling depth	1500 mm

Powerful hydraulic auger with many different auger diameters; for post hole boring, tree transplanting etc. Replaceable teeth (tungsten teeth as option) and pilot head enable drilling in hard ground also. Extension shafts available as option.

Hydraulic breaker



Model	
AVANT B70	
AVANT B110	

AVANT with a hydraulic breaker is an extremely efficient and versatile tool in demolition and refurbishing operations: with the same machine you can first do the demolition and then take the debris away with a bucket – very fast and effective.

Concrete mixer



Volume	80 l
Rotating	hydraulic
Weight	55 kg

AVANT concrete mixer is the ideal attachment for situations where electricity is not available or the mixed concrete must be transported and/or lifted to a place not easily accessible. The concrete mixer is powered by a hydraulic motor and emptying happens by tilting the mixer forward.

Rotary brooms



Working width	1050/1300 mm
Broom diameter	500 mm
Broom material	Nylon
Weight	130/160 kg

AVANT rotary broom is equipped with a floating bracket and three big support wheels in order to follow the contours of the ground. Sweeping angle can be adjusted manually (straight or $\pm 20^\circ$) Broom is made of nylon – solid steel or nylon/steel brooms are available as an option.

Dozer blade



Working width	1400 mm
Weight	100 kg
Angle	$\pm 30^\circ$
Blade height	380 mm

Equipped with hydraulic blade turning, the AVANT dozer blade is the ideal tool for jobs where the materials must be dozed away quickly. Blade is replaceable; standard blade has straight edge, can also be fitted with rubber or saw-type edge for efficient ice cutting.

Sand spreader



Working width	900 mm
Capacity	200 l
Operation	hydraulic
Weight	170 kg

A hydraulic sand spreader for fast and efficient sand spreading. Front mounting allows loading from ground level in the same way as with normal bucket. Powered by hydraulic motor and equipped with a mixer axle, which prevents the sand from clogging up. The plates in the feeding roll are spring loaded - this means stones will not block or break the spreader.

Leveler



Width	1200/1500 mm
Weight	60/70 kg

A simple and inexpensive but incredibly useful and efficient attachment for leveling and planing of larger areas. With AVANT leveler you can easily and quickly level sand, mulch etc. and prepare the soil e.g. for sowing grass. It is also very useful when leveling the yards and walkways.

Log grab



Log diameter max.	500 mm
Weight	60 kg

AVANT log grab mounts on Avant pallet forks. With the log grab you can lift and transport single logs or smaller timber bundles. The grab is equipped with a powerful hydraulic cylinder and it can therefore lift bigger stones and also branches, twigs and similar material.

Log splitter



Log diameter	max. 400 mm
Log length	max. 600 mm
Splitting capacity	40 logs/min
Weight	150 kg

AVANT log splitter is equipped with a hydraulic cylinder which pushes the log against the splitting blade. Height of the blade is adjustable, allowing splitting either into two or into four pieces. The splitter has automatic reverse and cylinder stroke can be adjusted with a limit switch.



Familiarise yourself with the wide AVANT loader and attachment range on our website:

www.avanttecno.com

On the website you can also download video clips of the machines at work. Consult also the website of your local AVANT dealer.

AVANT[®]

Ylotie I
33470 YLOJARVI
FINLAND

Tel. +358 3 347 8800

Fax +358 3 348 5511

e-mail: sales@avanttecno.com

AVANT has a policy of continuing improvement, and retains the right to change specifications without notice.

www.avanttecno.com